


TT MOBILE ADBLUE®

TECHNICAL DATA



TT MOBILE ADBLUE® 220

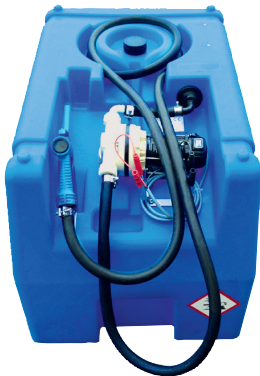

TT MOBILE ADBLUE® 440

The **TT MOBILE ADBLUE®** is a linear polyethylene tank designed for AdBlue®/DEF transport and delivery. It is fitted with: lockable lid (for mod. 440), built-in forklift pockets, handles for lifting and carrying the empty tank and integrated grooves for securing the tank with ratchet straps during transport.

All fittings are made in materials compatible with AdBlue®/DEF.

The TT MOBILE ADBLUE®/DEF is equipped with:

- Integrated forklift pockets (full tank lifting).
- Handles for lifting and carrying (empty tank).
- Integrated recesses for securing with ratchet lashing strap during transport.
- Lockable lid (mod. 440).
- 2" filling plug with integrate vent device.
- Battery transfer pump (12 V), flow rate 30 l/min.
- Battery power cable (4m) and clamps.
- 4 m of EPDM hose and automatic AdBlue® nozzle.
- Frontal nozzle holder.
- Mechanical Level gauge (mod. 440).

OPTIONAL ELEMENTS

Digital **METER** model K24 for AdBlue®/DEF.



Code	Model	Capacity (lt.)	Dimensions (mm.)	Weight (kg)	Pump
3822001	TT MOBILE 220 ADBLUE	220	910 x 600 x 620h	23	Electric 12V
3844001	TT MOBILE 440 ADBLUE	440	1200 x 800 x 785h	40	Electric 12V