

TT SQUARE HD ADR

TECHNICAL DATA

FULLY BUNDED AND SEALED TANK made in carbon steel with internal baffles, **approved by the Italian Ministry of Infrastructures and Transport**, built in accordance with **ADR regulations and UN marked**. The tank is suitable for the transport of flammable liquid fuel class II and III and is stackable when full.

Capacity: 950 liters.

The tank is fitted into a palletized metallic container which acts as a containment basin, with a capacity higher than 110% of the tank capacity.

TT SQUARE HD ADR is equipped as follow:

- Cover consisting of two lockable, independent lockable lids with gas pistons.
- Corner lifting lugs.
- Forklift pockets for easy handling.
- Anchorage points for secure fixing to the vehicle bed floor.
- Generator connection port (also with closed and locked lid).
- Outer tank total drainage point with cap.

LOADING COMPARTMENT:

- Inspection hatch, diameter 300 mm, with gasket and bolted cover.
- Loading port in brass/aluminium with 3" quick connection point.
- Homologated triple-effect safety valve.
- Emergency hand pump.

REFUELLING COMPARTMENT:

- 12V electric pump (or 24V on request), flow rate 65 L/min for the 9K version or 50 L/min for the 12K version, complete with battery cable and clamps
- 5 m delivery hose and automatic nozzle with holder
- Quick connection coupling kit, for connection to generators (return and feeding lines)
- Mechanical level indicator.


OPTIONAL ELEMENTS

Digital **FUEL METER** model K24.

WATER ABSORPTION filter kit.

Second set of **QUICK CONNECTION CUPLING** kit.

FIRE EXTINGUISHER.

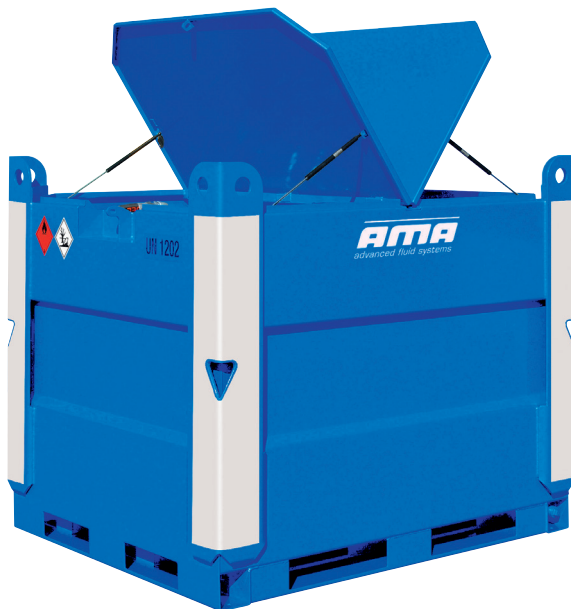

Code	Model	Capacity (lt.)	Dimensions (mm.)	Weight (kg)	Pump flow rate
411000-2	TT SQUARE HD ADR-9K	950	1210 x 1475 x 1260h	662	65 l/min
411000-1	TT SQUARE HD ADR-12K	950	1210 x 1475 x 1260h	662	50 l/min
411000	TT SQUARE HD ADR-G.E.	950	1210 x 1475 x 1260h	640	-